



KEDER SPECIFICATION


| Keder Type | Rod Diameter | O/A Diameter | Cloth Type | Cloth Colour | Weld Size | Leg Size | Leg Type | Roll length (m) |
|--------------------|--------------|--------------|--------------|--------------|-----------|----------|----------|-----------------|
| 4mm Standard | 6mm | 6.5mm | 1 x 1 weave | White | 5 mm | 25 mm | Double | 100 |
| 8mm standard | 8mm | 8.5mm | 2 x 2 Panama | White | 10 mm | 30 mm | Double | 250 |
| 10mm Standard | 10mm | 10.5mm | 2 x 2 Panama | White | 10 mm | 29 mm | Double | 250 |
| 12mm Standard | 12mm | 12.5mm | 2 x 2 Panama | White | 10 mm | 25 mm | Double | 250 |
| 8mm Teflon coated | 8mm | 8.5mm | 2 x 2 Panama | White | 10 mm | 30 mm | Double | 250 |
| 10mm Teflon coated | 10mm | 10.5mm | 2 x 2 Panama | White | 10 mm | 29 mm | Double | 250 |
| 12mm Teflon coated | 12mm | 12.5mm | 2 x 2 Panama | White | 10 mm | 25 mm | Double | 250 |



Keder packed on Pallet

Our keder product is manufactured from a solid PVC core wrapped using quality reinforced PVC coated fabric and is available in a number of different sizes.

With over 40 years experience in fabric engineering, we have developed our own unique fabrication process for the manufacture of keder. This process in addition to welding the PVC cloth to itself also fuses the material to the core rod to create a very consistent flat and smooth product. Our keder is supplied in neat machine rolled coils for ease of use.

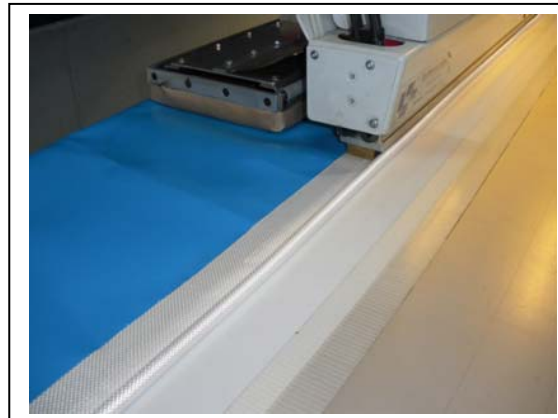

Range of Keder Profiles

Station Road ,Thirsk North Yorkshire, YO7 1PZ

Tel: 44 (0) 1845 525503 Fax 44 (0) 1845 525485 email:info@powerplastics.co.uk Internet: www.powerplastics.co.uk